


Woolwax™ Supreme Undercoating Applicator Gun. Instructions.



The Woolwax™ Supreme undercoating kit has a heavy gauge (1) liter container that has a pressure rating to 110 psi maximum. This allows the Supreme applicator to have better atomization and faster delivery of viscous products.

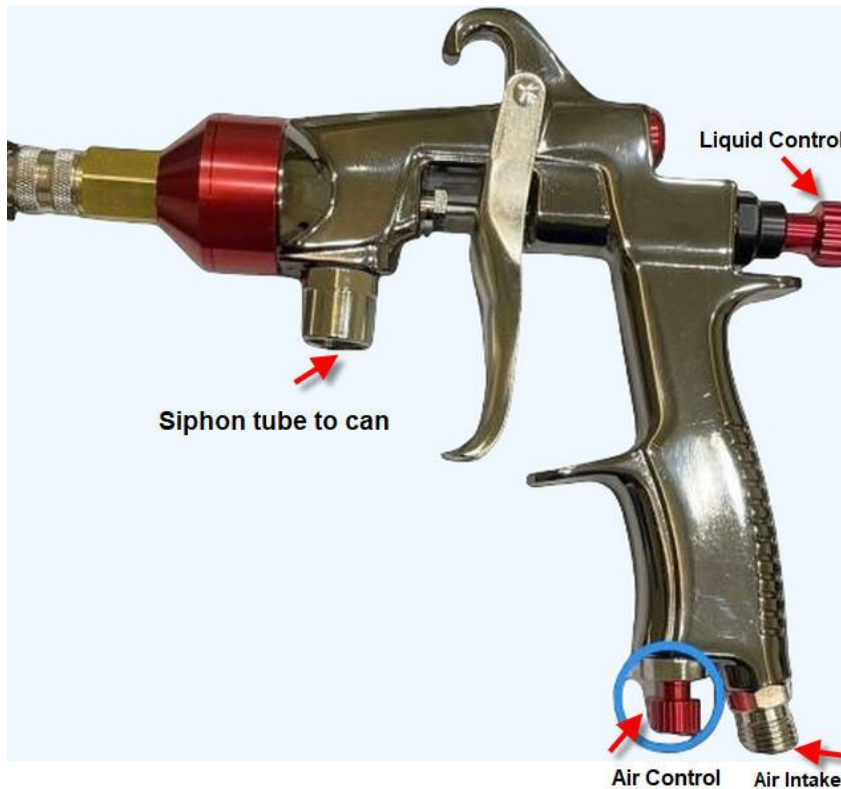

Maximum psi: 110
Air intake fitting: Standard 1/4 “

Using the controls

The first time you use a spray gun, practice with water instead of Woolwax. This way you can get “the feel” of the gun. Close the fan and fluid controls (turn them clockwise).

- The ideal psi is generally 70-90 psi. Every compressor setup is different, and varies according to line loss, tank size, etc. Start at a lower psi 70+/- psi and work your way up. Testing the gun with water will usually only require a low psi. An air regulator at the gun is helpful, but not necessary.

See next page >

Open the air control at the base of the handle all the way by turning it counter clockwise until it stops.

- Depress the trigger and slowly open the fluid control knob on the back of the gun — this controls the amount of liquid. As you open the valve, a pattern of fluid will appear.
- You will need to experiment with the correct settings to find the ideal setting for your coating, temperature, viscosity, etc.

Air pressure affects results

A good working range is normally between 70-90 psi, with a warm coating. In colder weather, please be sure that Woolwax™ is heated to 90-100°F. No two sprayers are likely to agree on the same settings, so it's a matter of personal preference.

Use the lowest pressure needed to atomize the coating and have it flow out. Start at low pressure, and increase the pressure as needed.

Cleanup

After every use, the Woolwax™ should be returned to the can, and the gun should be flushed and cleaned with water. Drain the Woolwax™ from the gun, then add a little water to the spray cup. Swish it around, then spray some through the gun to empty it of coating. Wipe any coating off the parts; then the gun is ready for rinsing in a sink. Hold the gun upside down and flush it with warm water running through the siphon tube and out through the spray nozzle. Dry all parts before putting the gun away.

** The air intake fitting is not removeable. Do not try to tighten/loosen it.

WARNING: DO NOT UNDER ANY CIRCUMSTANCES USE MORE THAN THE SUGGESTED AIR PRESSURE. SERIOUS INJURY CAN OCCUR. ALWAYS WEAR EYE PROTECTION.

kellsport products / Woolwax™ T: 508-676-1455

www.woolwaxusa.com